


PRODUCT INTRODUCTION AND SIZE



External size: W1075*D990*H2300
Internal size: W945*D897*H2170

Unit: mm




▲ 顶视图 (Top View)



▲ 正视图 (Front View)



▲ 右视图 (Right View)

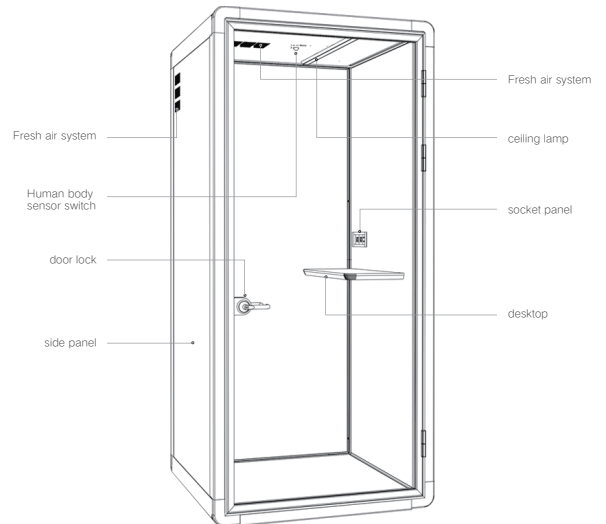

USER INSTRUCTION

READ BEFORE START



Dear customer, Thanks for choosing our product, please mind these tips below during the installation:

1. Two or more person should be prepared for the installation ;
2. Please use cushioning material for stacking parts after unboxing in case damaging floor or product;
3. Please don't scratch any part with hard tool;
4. Please check all listed tools are prepared;
5. Please check the space for installtion is sufficient;
6. Please follow the step by number to build;

NUMBERING RULES

A-00 Aluminum alloy
B-00 Side panel
C-00 Fastening
D-00 Interior
E-00 Electronics
F-00 Accessory
G-00 Furniture

A-00 Aluminum alloy

Code	Desc.	Qty.	Model
A-01	Upper left arc material	1	
A-02	Upper right arc material	1	
A-03	Lower left arc material	1	
A-04	Lower right arc material	1	
A-05	Mullion	4	
A-06	Horizontal material	1	
A-07	Horizontal material	1	
A-08	Horizontal material	1	
A-09	Horizontal material	1	
A-10	Door pocket	1	
A-11	Curved cover	8	

C-00 Fastening

Code	Desc.	Qty.	Model
C-01	Door closer	1	
C-03	Door lock	1	

B-00 Side panel

Code	Desc.	Qty.	Model
B-01	Left steel plate	1	
B-02	Right steel plate	1	
B-03	Top steel plate	1	
B-04	Bottom steel plate	1	
B-05	Glass frame - Rear	1	
B-06	Door leaf	1	

D-00 Interior

Code	Desc.	Qty.	Model
D-01	Left sound-absorbing cotton	1	
D-02	Right sound-absorbing cotton	1	
D-03	Top sound-absorbing cotton	1	
D-04	The carpet	1	

E-00 Electronics

Code	Desc.	Qty.	Model
E-01	Combined socket	1	
E-02	LED lighting	1	
E-03	Infrared sensor	1	

F-00 Accessory


Code	Desc.	Qty.	Model
F-01	Power cord	1	
F-02	M5 Allen wrench	2	
F-03	wrench	1	
F-04	Coat hook	4	
F-05	M5*15 hexagon socket screw M5*15 hexagon socket screw	54	
F-06	Silicon sealing strip	1	

G-00 Furniture


Code	Desc.	Qty.	Model
G-01	desktop	1	
G-02	Desktop Support	1	
G-03	Table bolt	2	

INSTALLATION STEPS


1

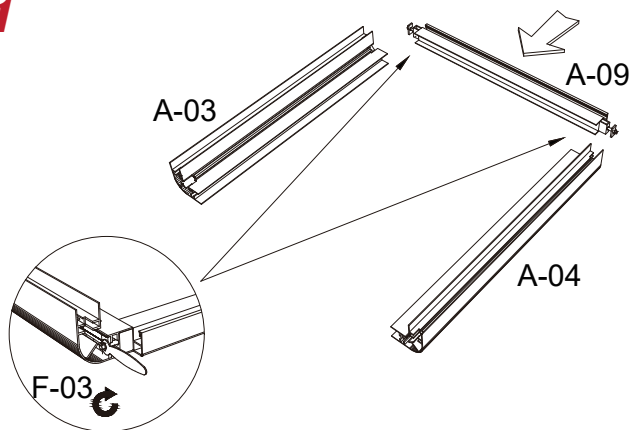


2

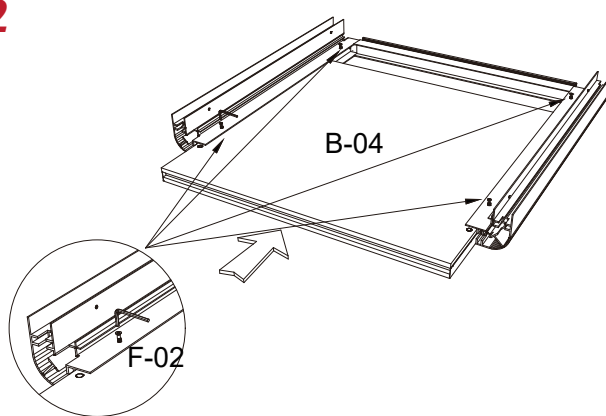


3

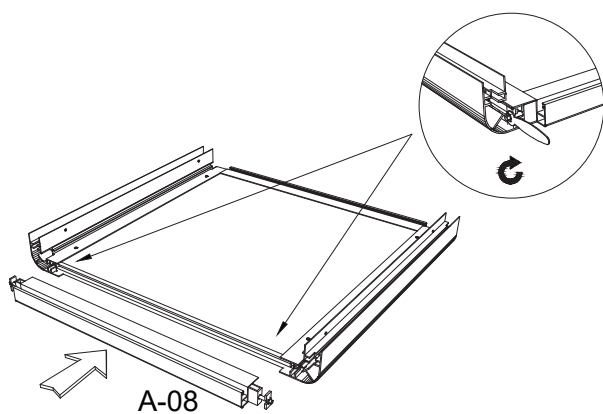


4

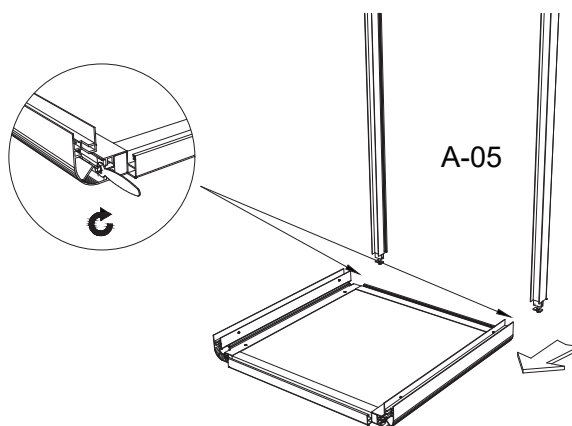


5

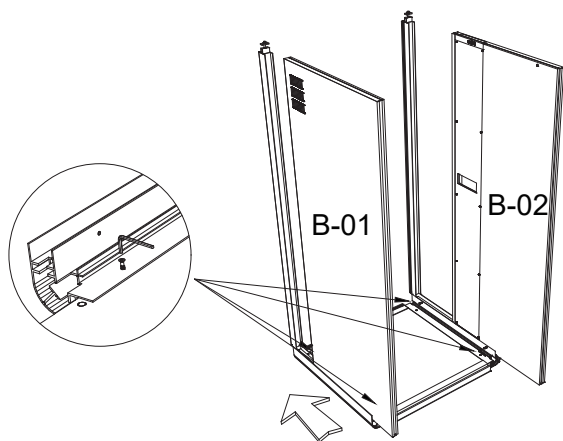


6

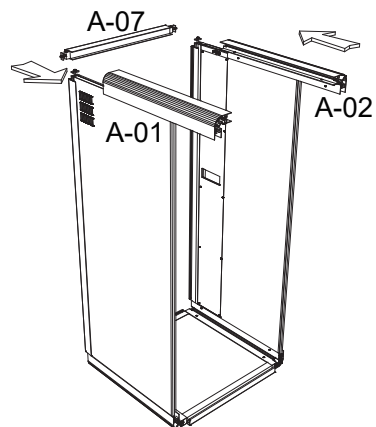


7

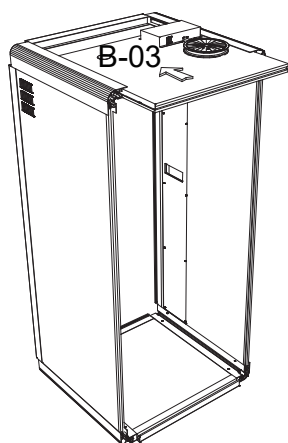


8

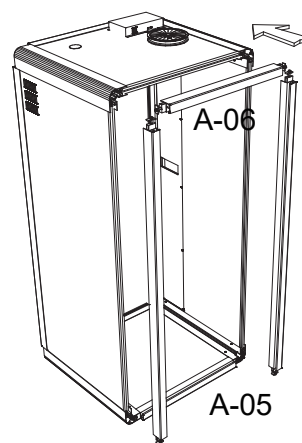


8



Link


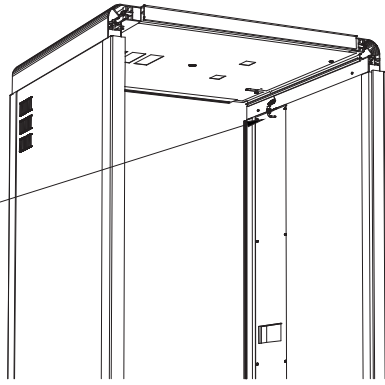


9

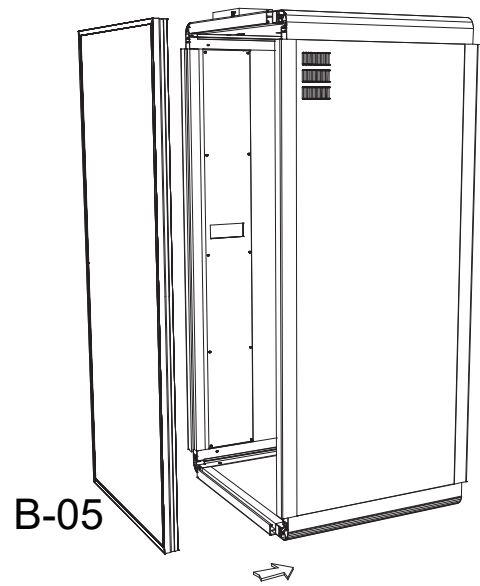


B-05

10

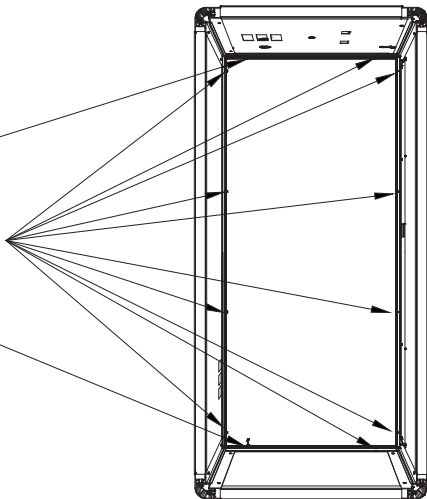


11

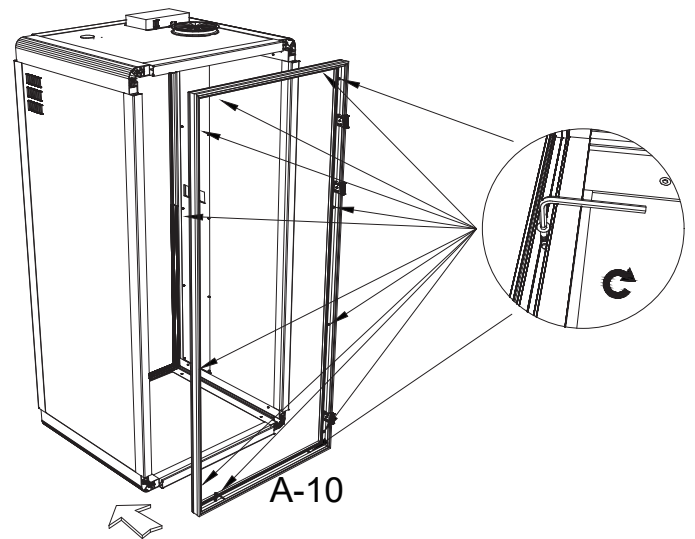


A-10

12

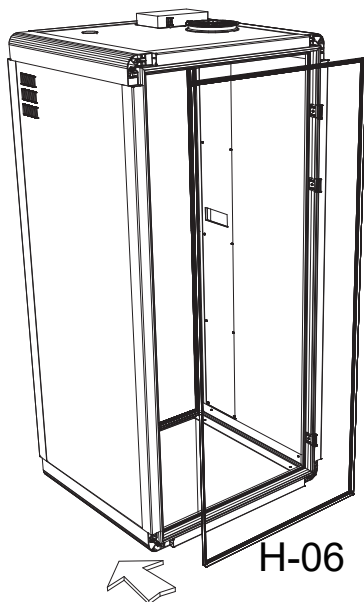


H-06

13

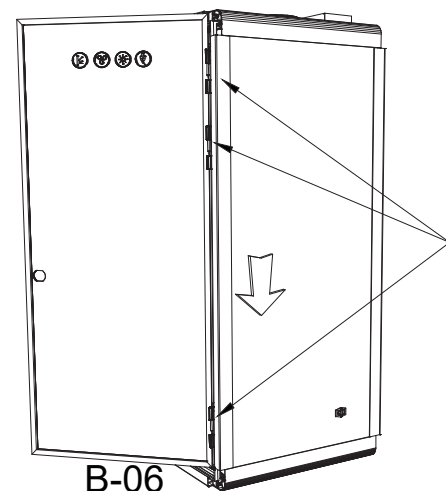


B-06


14

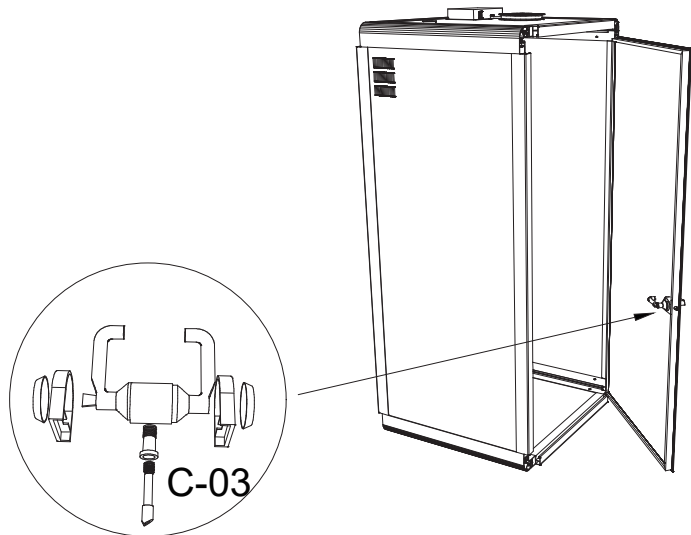


15

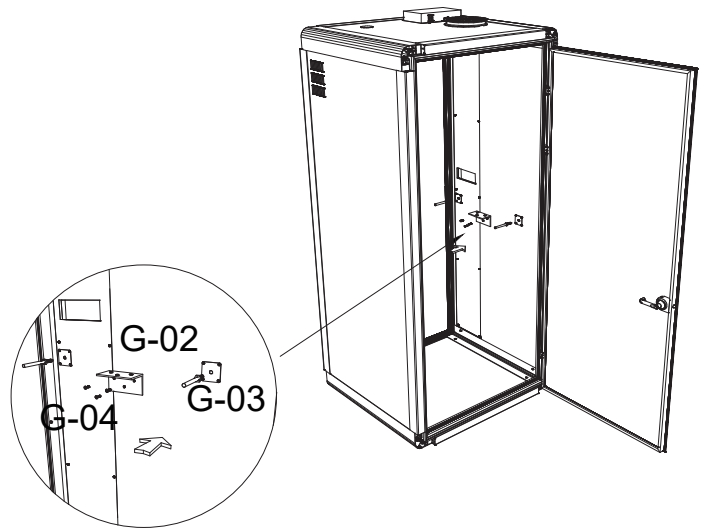


16

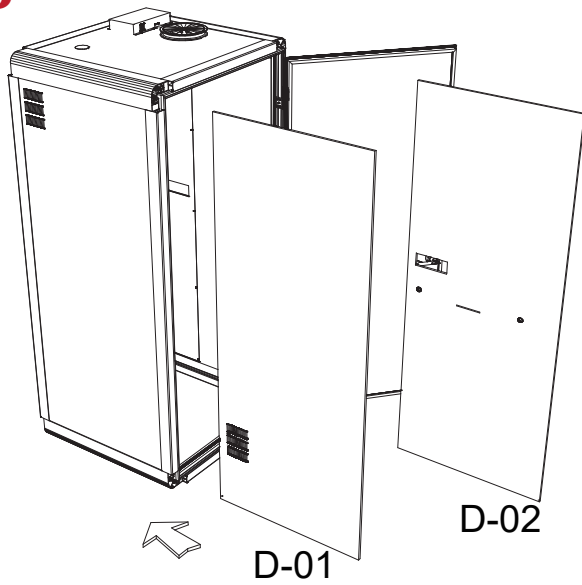


17

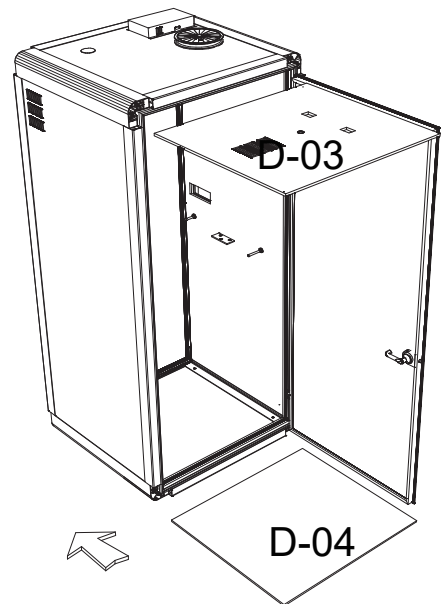


18

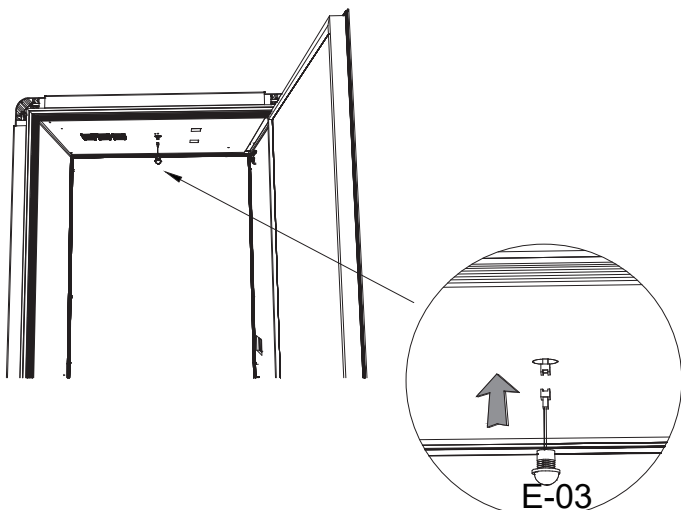


19

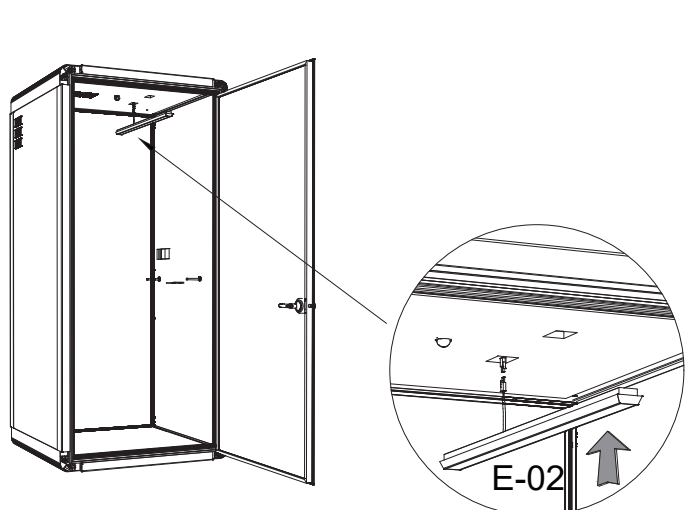


20

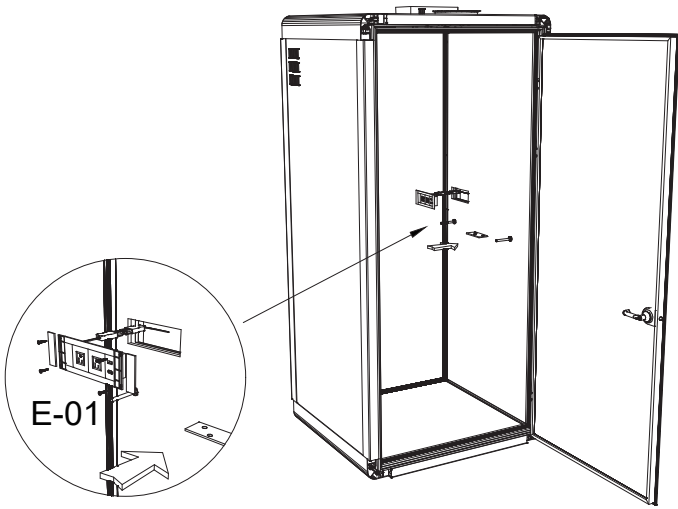


21

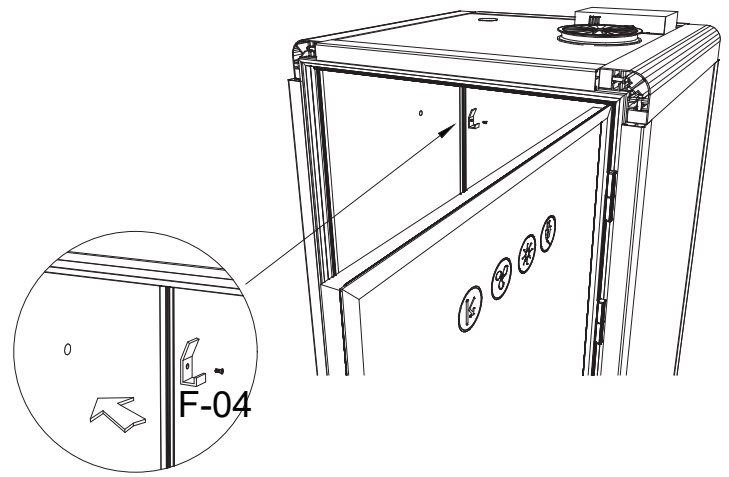


22

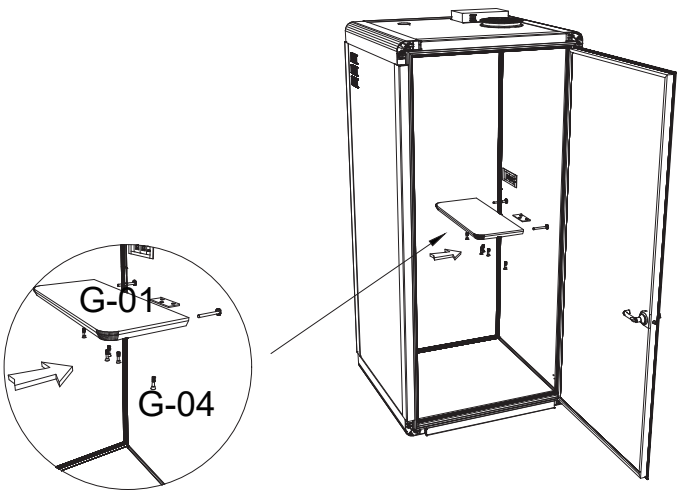


23

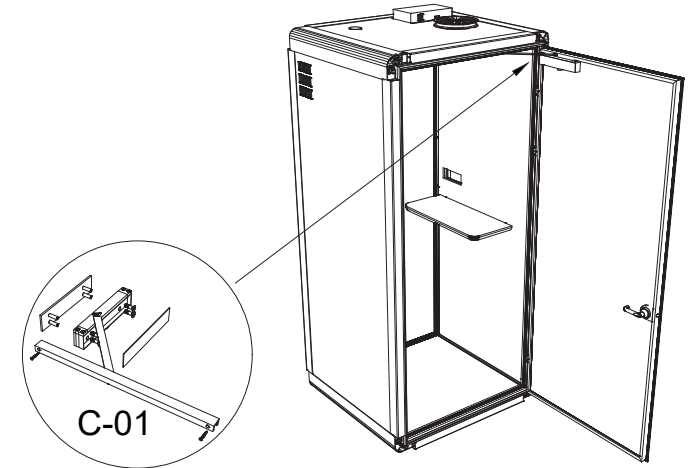


24

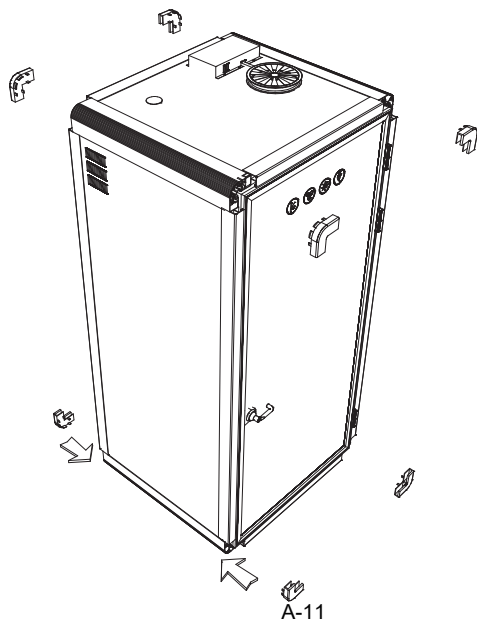

25

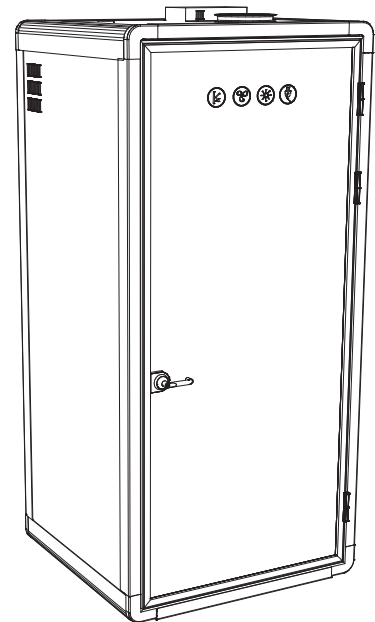

26 (finish)

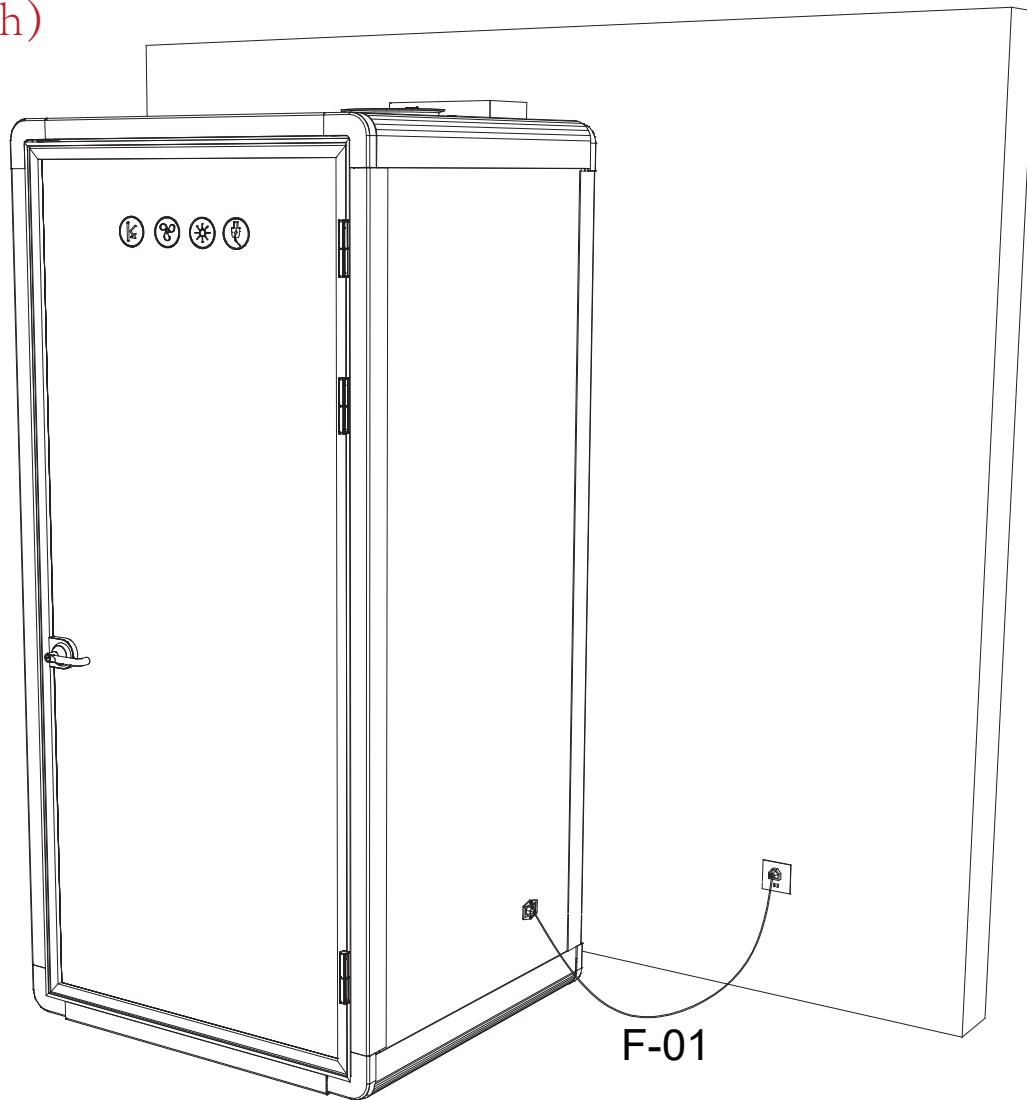

PRODUCT INTRODUCTION

Use Restrictions

- Do not use high-power electrical appliances of more than 1000w to prevent the circuit from being burnt out
- Do not change the product circuit without permission to prevent electric leakage
- Do not damage the switch, socket and bluetooth panel to prevent electric leakage
- Do not scratch sound-absorbing cotton or glass with sharp tools
- Do not smoke or use open flames in the cabin
- The door cannot be opened or closed vigorously

Routine Maintenance

- The product needs to be repaired by professional personnel of the company. Do not disassemble it by yourself
- Do not put anything more than 20kg on the table and 10kg in a single cabin
- In case of failure, please cut off the power supply quickly.
- Keep the side vents unobstructed
- Please keep clean in time

Problems and Solutions

- Question 1: there is no electricity in the silent cabin, the fan does not turn, and the light does not light up
 1. Check whether the power cord is plugged in properly
 2. Check whether the fuse of the power socket is burnt out
 3. Check whether the quick connect is wired according to the label
 4. Check whether the quick connect wire is clamped
 5. Check whether the switch panel is properly connected
- Question 2: About glass door tilt
 1. Check whether there are silica gel pads on both sides of the glass at the hinge
 2. Loosen the screws at the clamping glass, adjust the glass position and lock the screws