EXPLODED DIAGRAM

Partition assembling

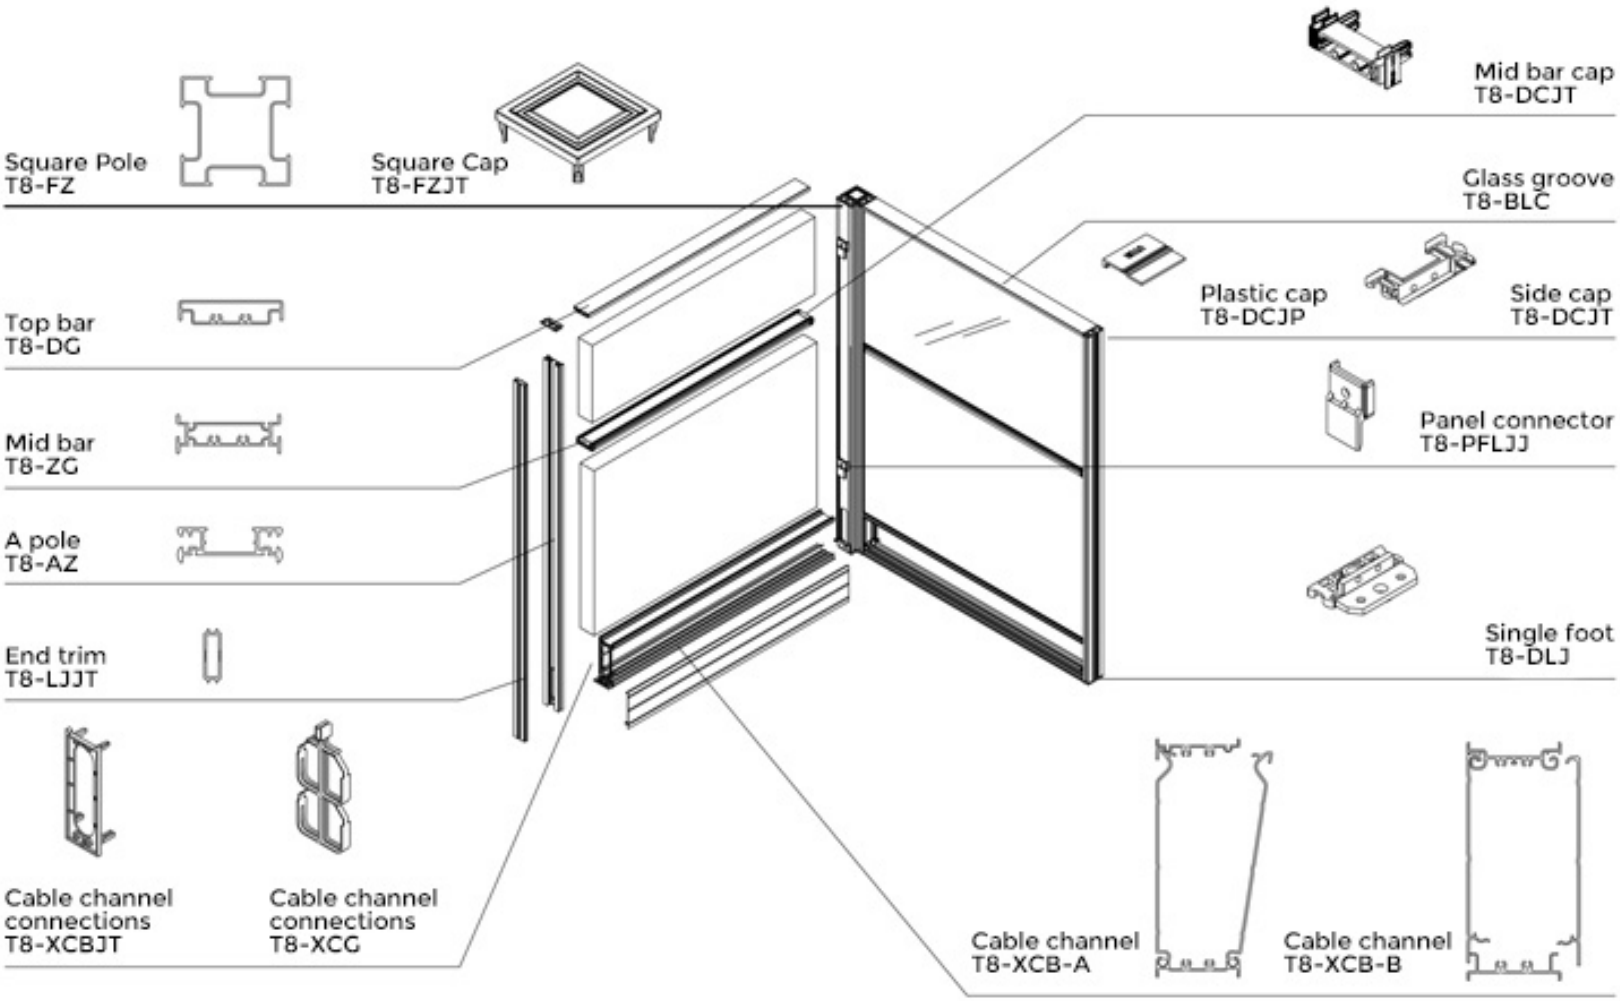
Square Pole
T8-FZ
Square Cap
T8-FZJT
Mid bar cap
T8-DCJT
Glass groove
T8-BLC
Top bar
T8-DG
Plastic cap
T8-DCJP
Side cap
T8-DCJT
Panel connector
T8-PFLJJ
Mid bar
T8-ZG
A pole
T8-AZ
Single foot
T8-DLJ
End trim
T8-LJJT
Cable channel connections
T8-XCBJT
Cable channel connections
T8-XCG
Cable channel
T8-XCB-A
Cable channel
T8-XCB-B



Glass Clip
T8-BLJ







Balance Foot
T8-TYPHJ



Accessories Rail
T8-75GCB







Spin
T8-XZJG

ACCESSORIES DISPLAY

Components general list



A Pole T8-XAZ
3480# 0.73kg/m



Mid Bar T8-XZG
3479# 0.63kg/m



Bottom Ba T8-DG
3526# 0.26kg/m



Square Pole T8-FZ
3521# 1.13kg/m



150 Cable Top Bar
T8-150XCHGA
3520# 0.38kg/m



150 Cable Bottom Bar
T8-150XCHGB
3521# 0.43kg/m



Top Bar T8-DG
3147# 0.52kg/m



120° Pole T8-120DZ
3175# 0.52kg/m



Thin&Wide Connection Pole
T3-T8LJZ
3611# 0.84kg/m



120 Cable Top Bar
T8-XCHGC
3220# 0.55kg/m



120 Cable Bottom Bar
T8-XCHGB
3186# 0.49kg/m



120° 2 Way Pole
T8-120DLXZ
3467# 0.45kg/m



750 Accessories Rail T8-750ZSGB
2920# 1.21kg/m



Cable Channel T8-150XCB
3519# 0.81kg/m



Square Foot
T8-FZJ



120 Cable Channel
T8-120XCB
3179#
0.53kg/m



120° Cap
T8-120DG



Side Top Cap
T8-DCJT



Single Foot
T8-DLJ



Panels Connector
T8-PFLJJ



120° Panels Connector
T8-PFLJJ



Square Cap
T8-FZG



Plastic Cap
T8-DCJC



New Middle Bar Connector
T8-XZGJT



Wire Manager
T8-XCG



Adjustor
T8-40TJJ



Thin&Wide Panel Cap
T8-T3JT



Small Bracket
T8-XTB（L/R）



Accessories Rail Bracket
T8-ZSBGG



Cable Channel Connector
T8-XCBJT



Glass Panel Fixer
T8-BLPFJ



Thin&Wide Panel Foot
T8-T3DJ



438 Small Bracket
T8-438XGB



Big Bracket
T8-DTB（L/R）



Double Side Bracket
T8-SMTB



Glass Sealing
T8-BLJT



Plastic Connection
T8-LJJT

PUNCHING DIE

Holes punching

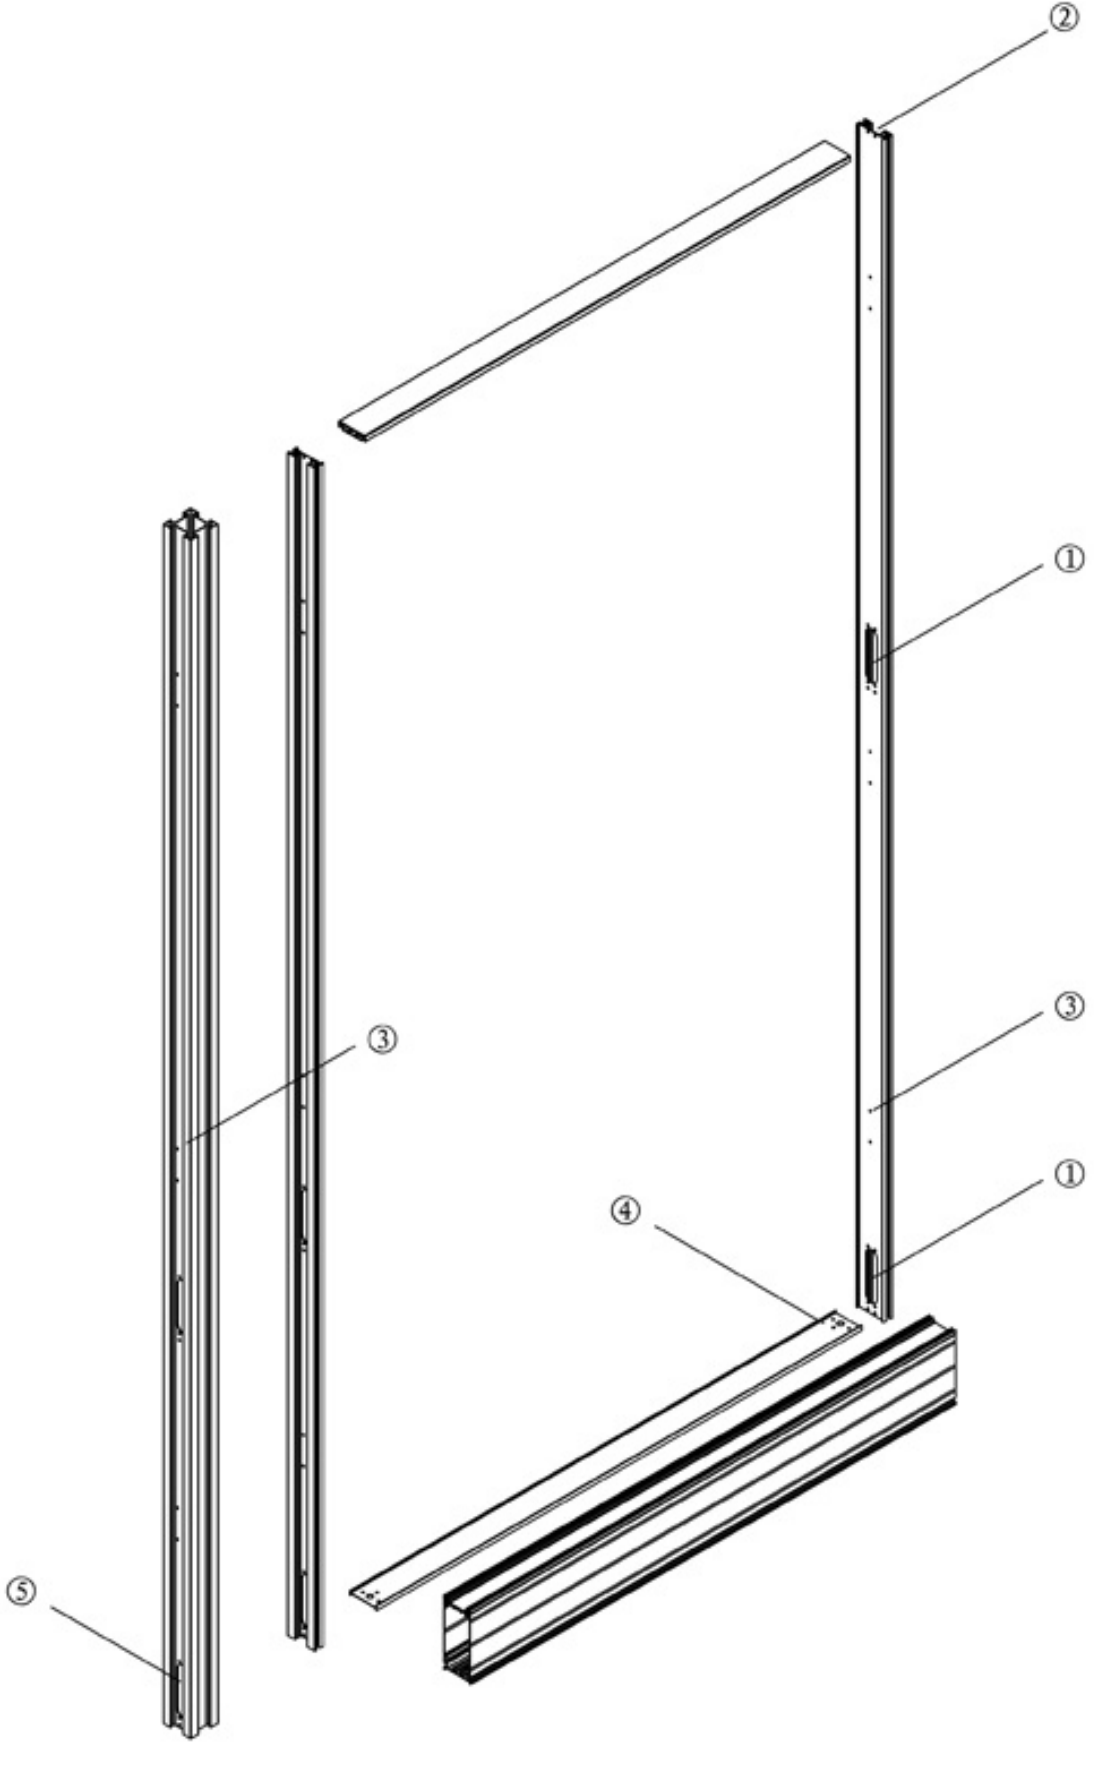

① A pole wires running hole



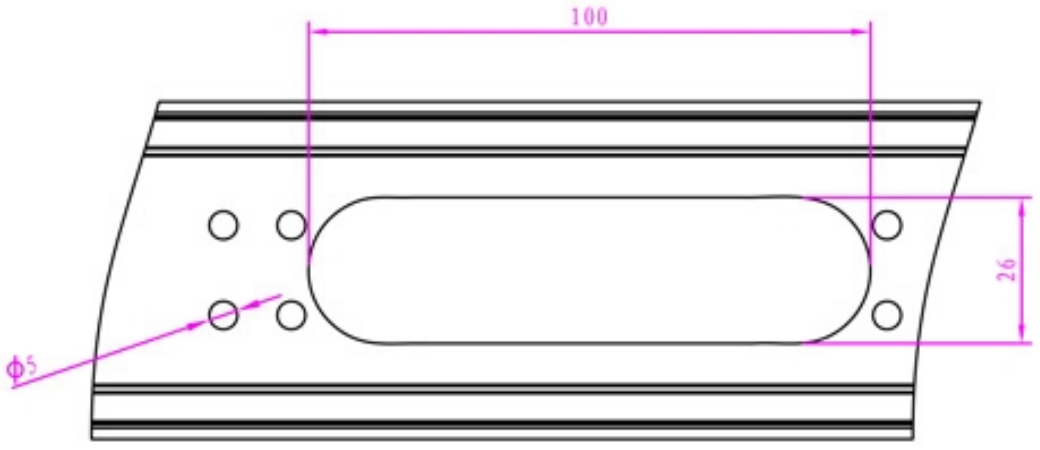

② A pole frame connection holes

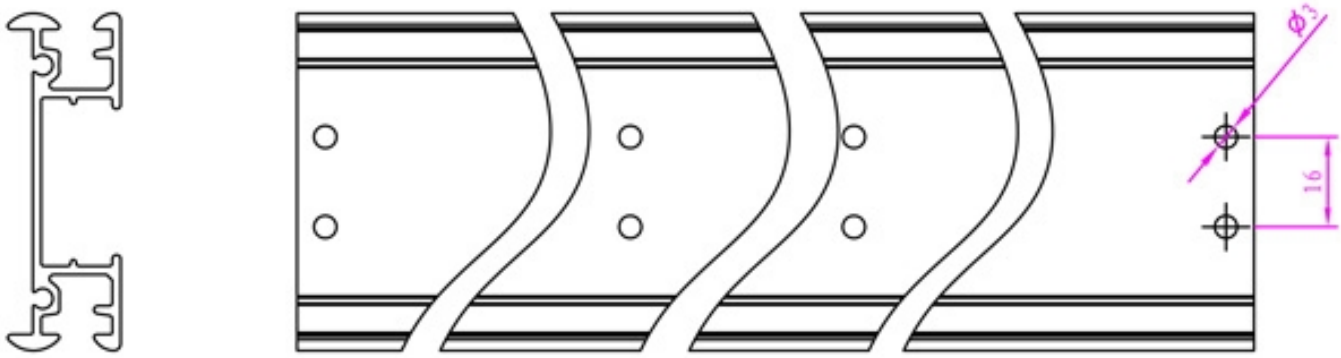

③ Bottom bar/120 cable bottom bar adjusted foot hole

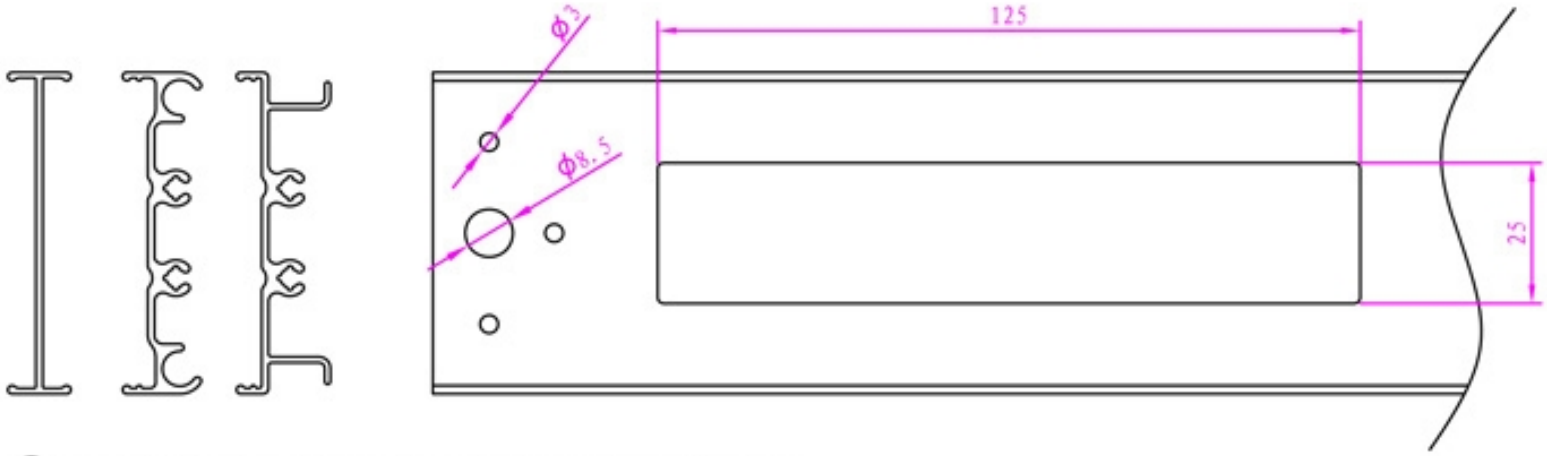
Φ3
125
Φ8.5
25

④ Square pole wires passing hole

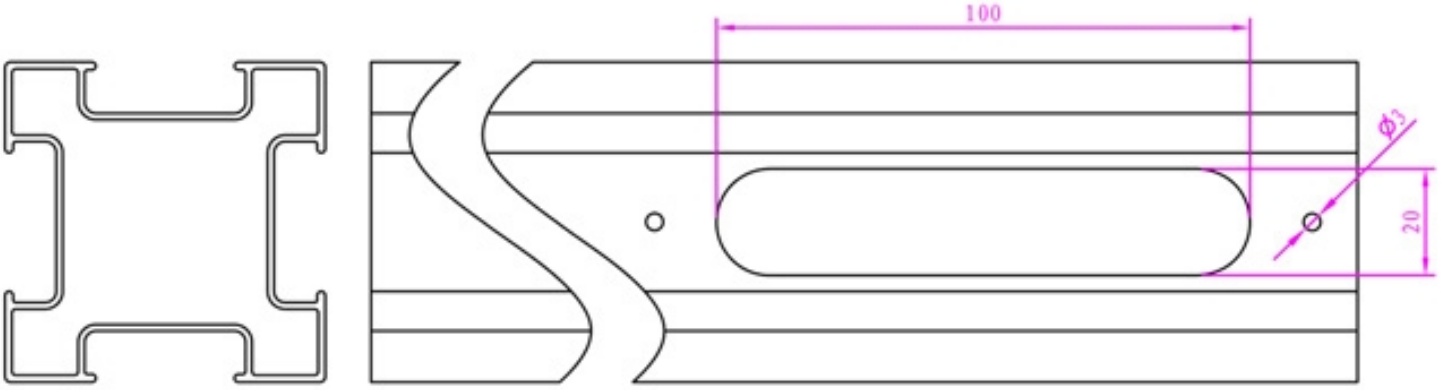

⑤ A pole/square pole panels connection holes

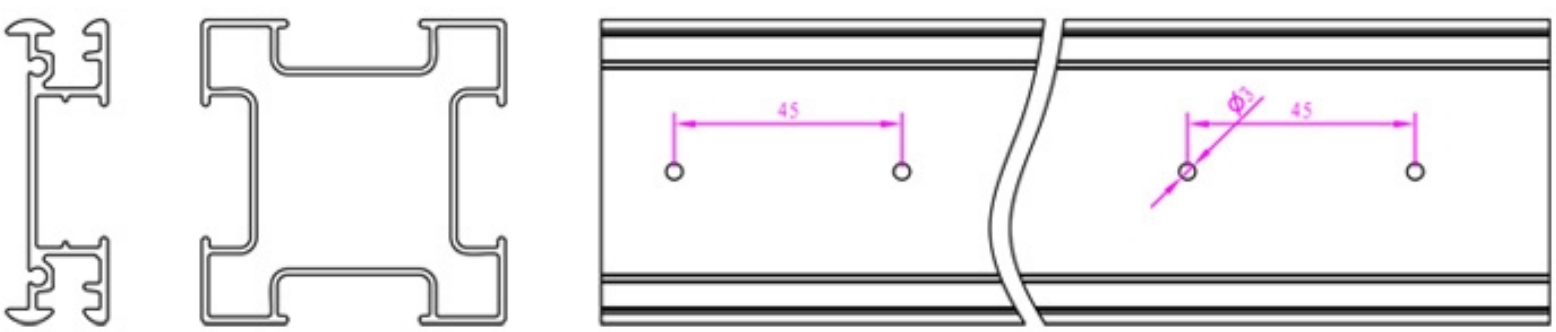

ALUMINUM CUTTIING DETAILS

Cut length logic of profiles

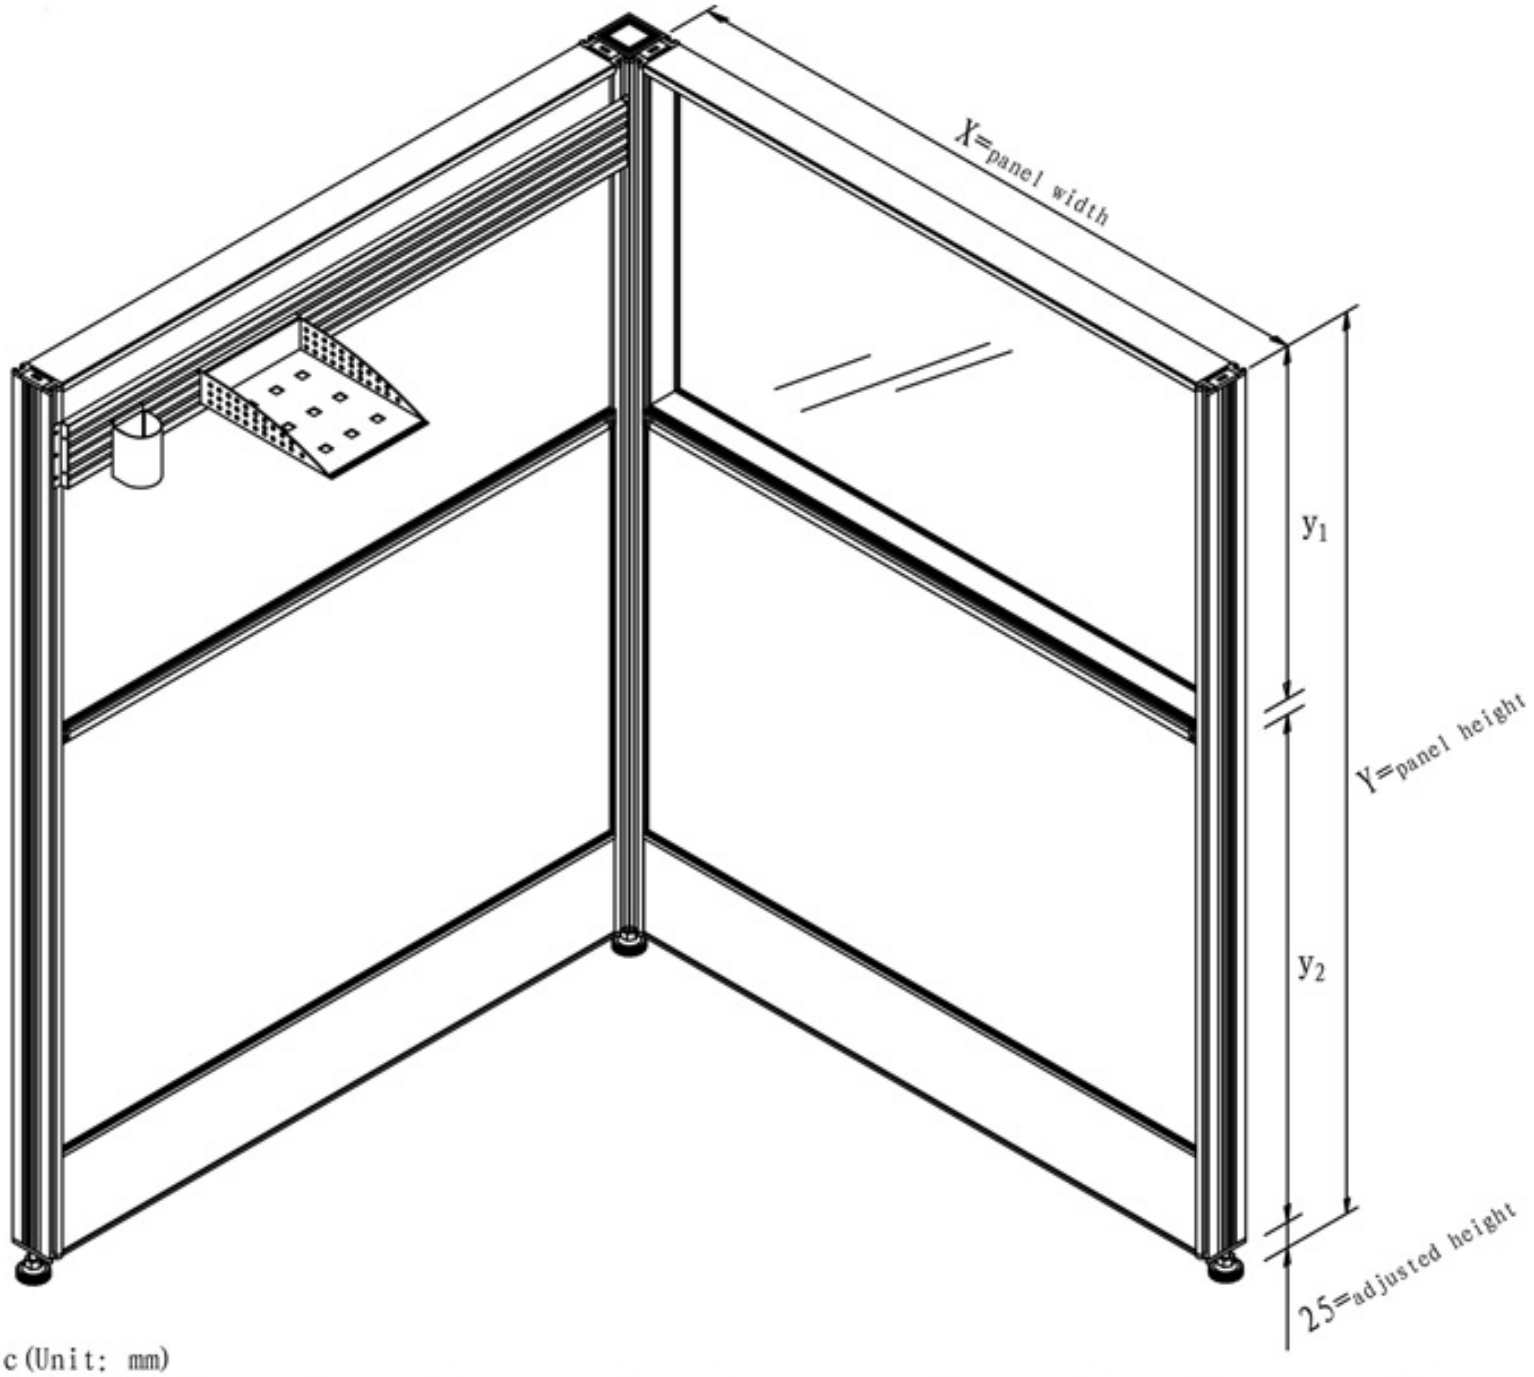
X=panel width
y1
y2
Y=panel height
25=adjusted height

Logic(Unit: mm)

Item	Code	Spec	Image
Top Bar	T8-DG	X-40	
Mid Bar	T8-ZG	X-60	
Bottom Bar	T8-XG	X-40	
Cable Top Bar	T8-XCHGA	X-40	
Cable Bottom Bar	T8-XCDG	X-40	
Cable Channel	T8-150XCB	X-40	
Cable Top Bar	T8-XCHGB	X-40	
Cable Bottom Bar	T8-XCHGC	X-40	

Item	Code	Spec	Image
A Pole	T8-AZ	y-35	
Square Pole	T8-FZ	y-35	
Side Cover	T8-LJJT	y-35	
120° Pole	T8-120DZ	y-35	
120° 2 ways Pole	T8-120DLXZ	y-35	
Thin&Wide connection Pole	T3-T8LJZ	y-36	

Cable Channel	T8-120XCB	X-40			
Accessories Rail	T8-750ZSGB	X-40			

BOARD CUTTING DETAILS

Cut length logic of partition blocks

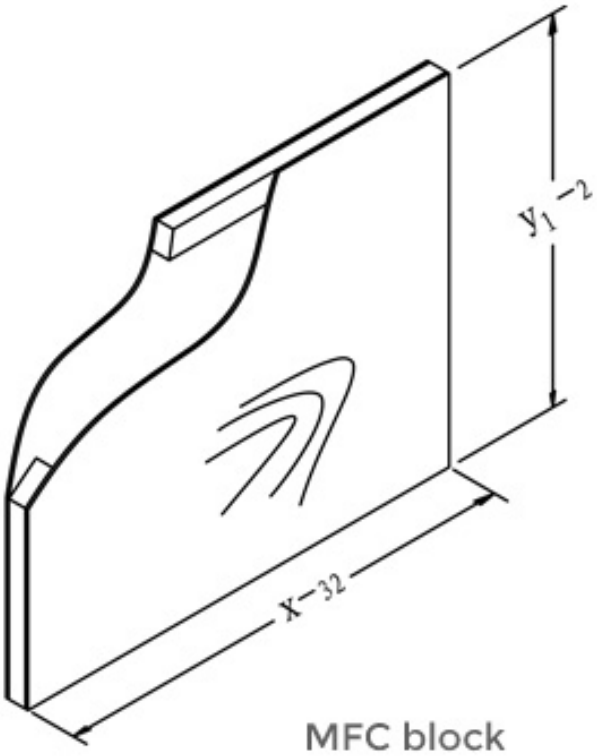

MFC block

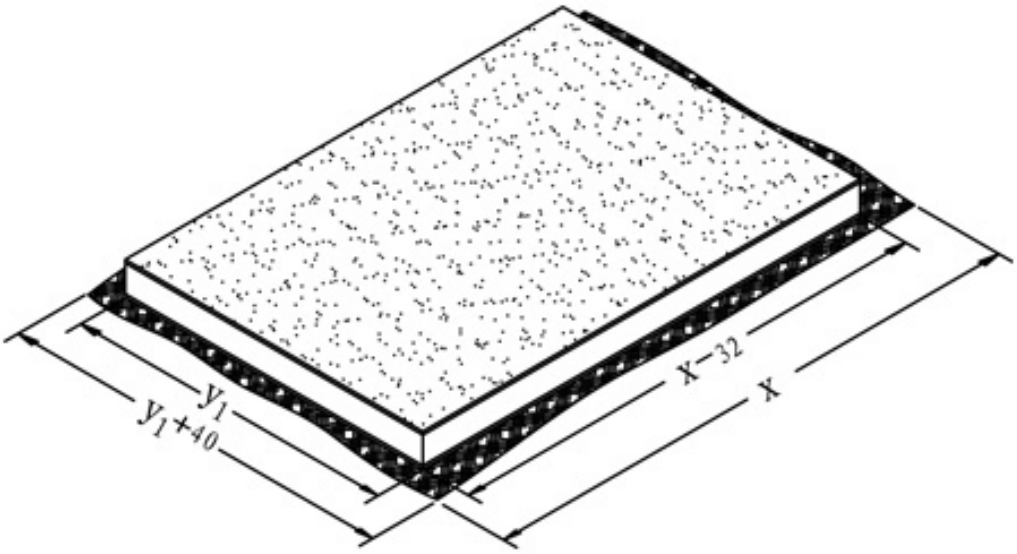
y1
y1+40
x-32
x

Fabric block

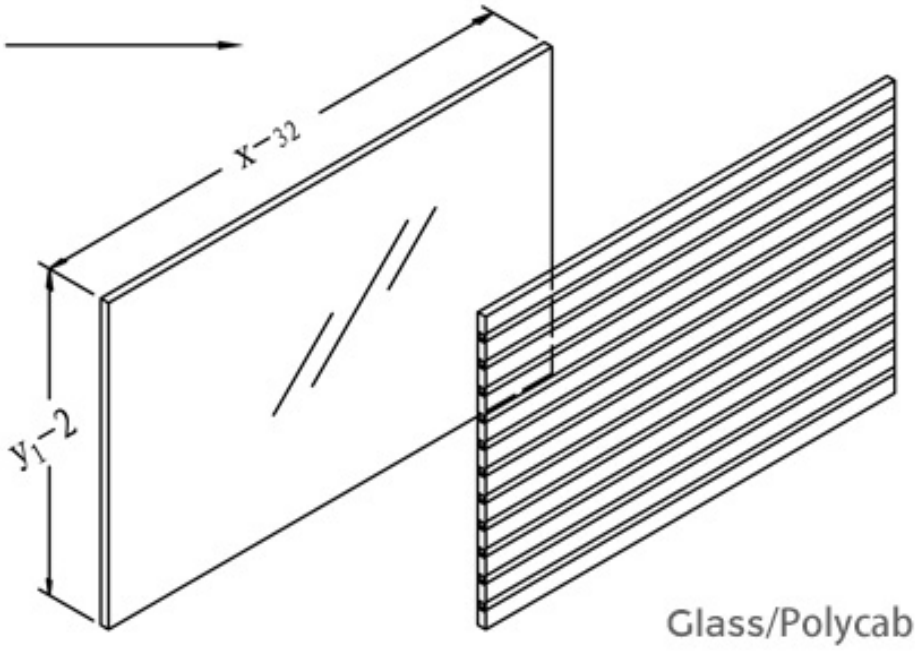

Glass/Polycabonate

STRUCTURE DISPLAY

01

CHARACTERS

A: Flat end cap and flat trining,panel thickness=60mm



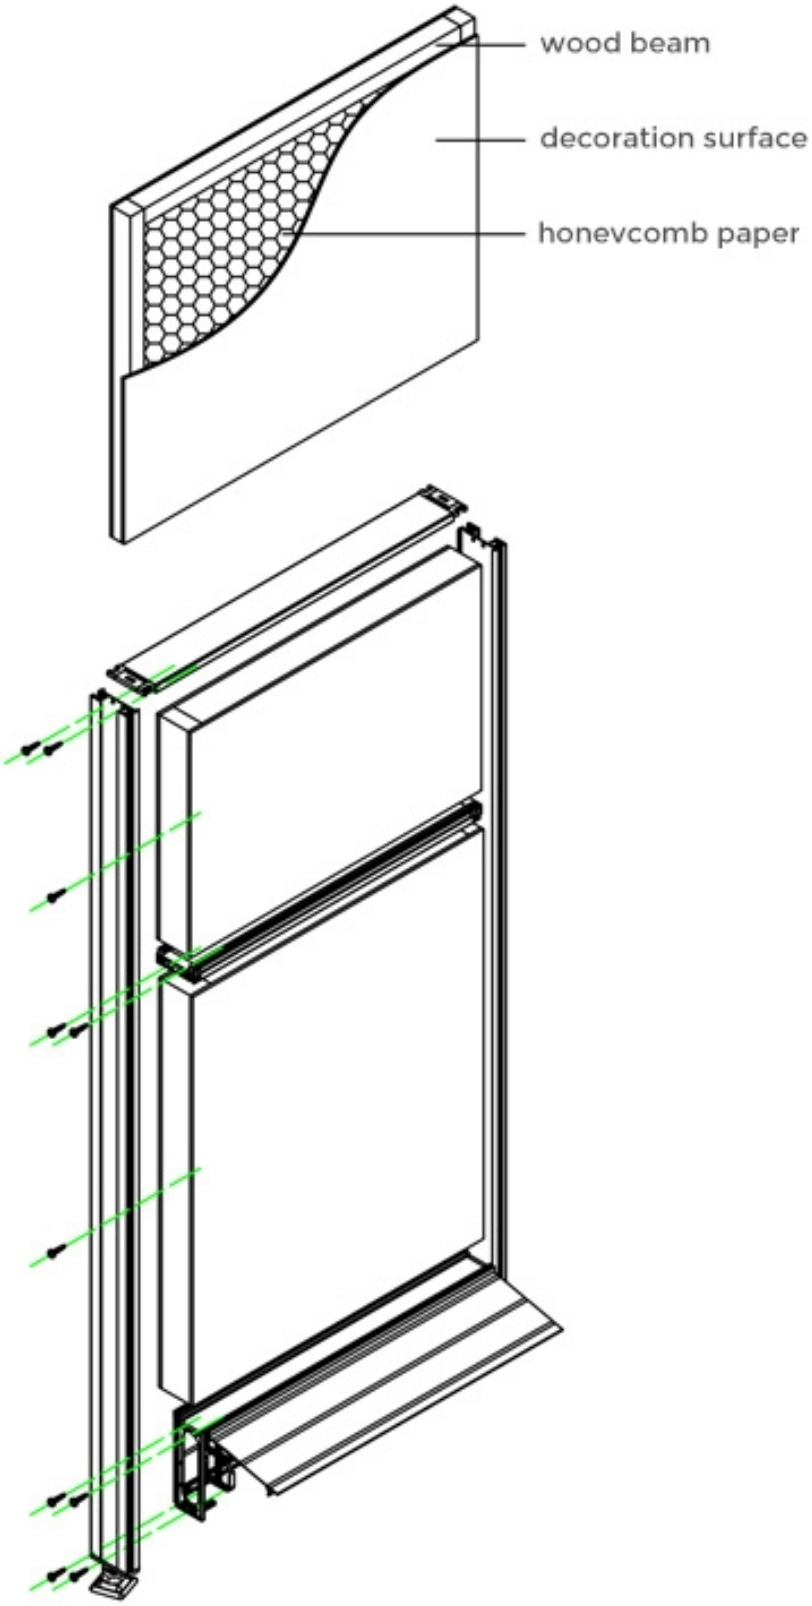
wood beam
decoration surface
honevcomb paper

B: Block-base structure



C: Wires capacity

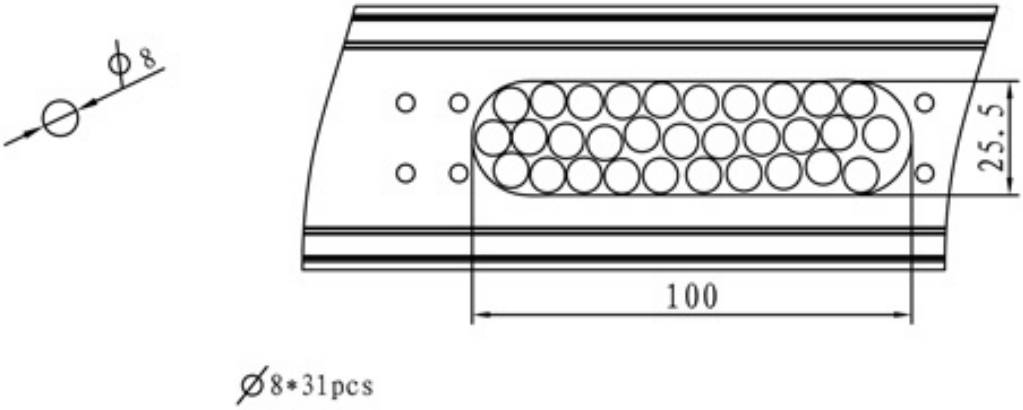
ϕ8
25.5
100
Ø8*31pcs

02

PANEL WOOD BLOCK STRUCTURE

Style 1: wood block above table top

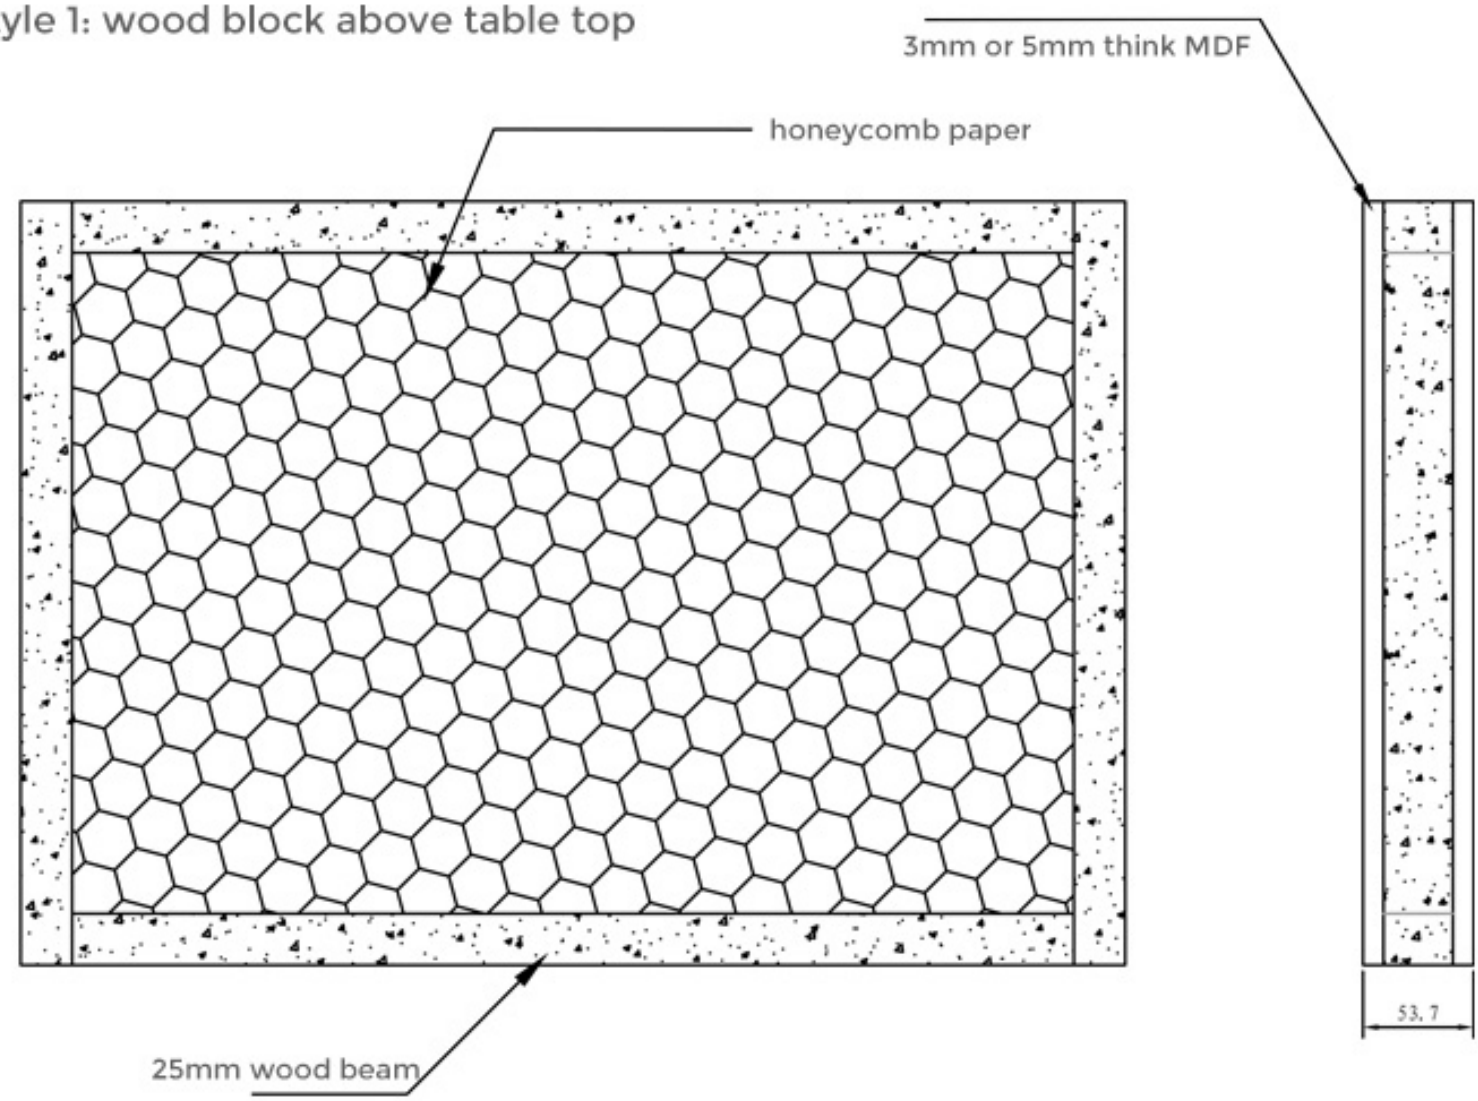
3mm or 5mm think MDF
honeycomb paper
25mm wood beam
53.7

Style 2: wood block under table top


3mm or 5mm think MDF

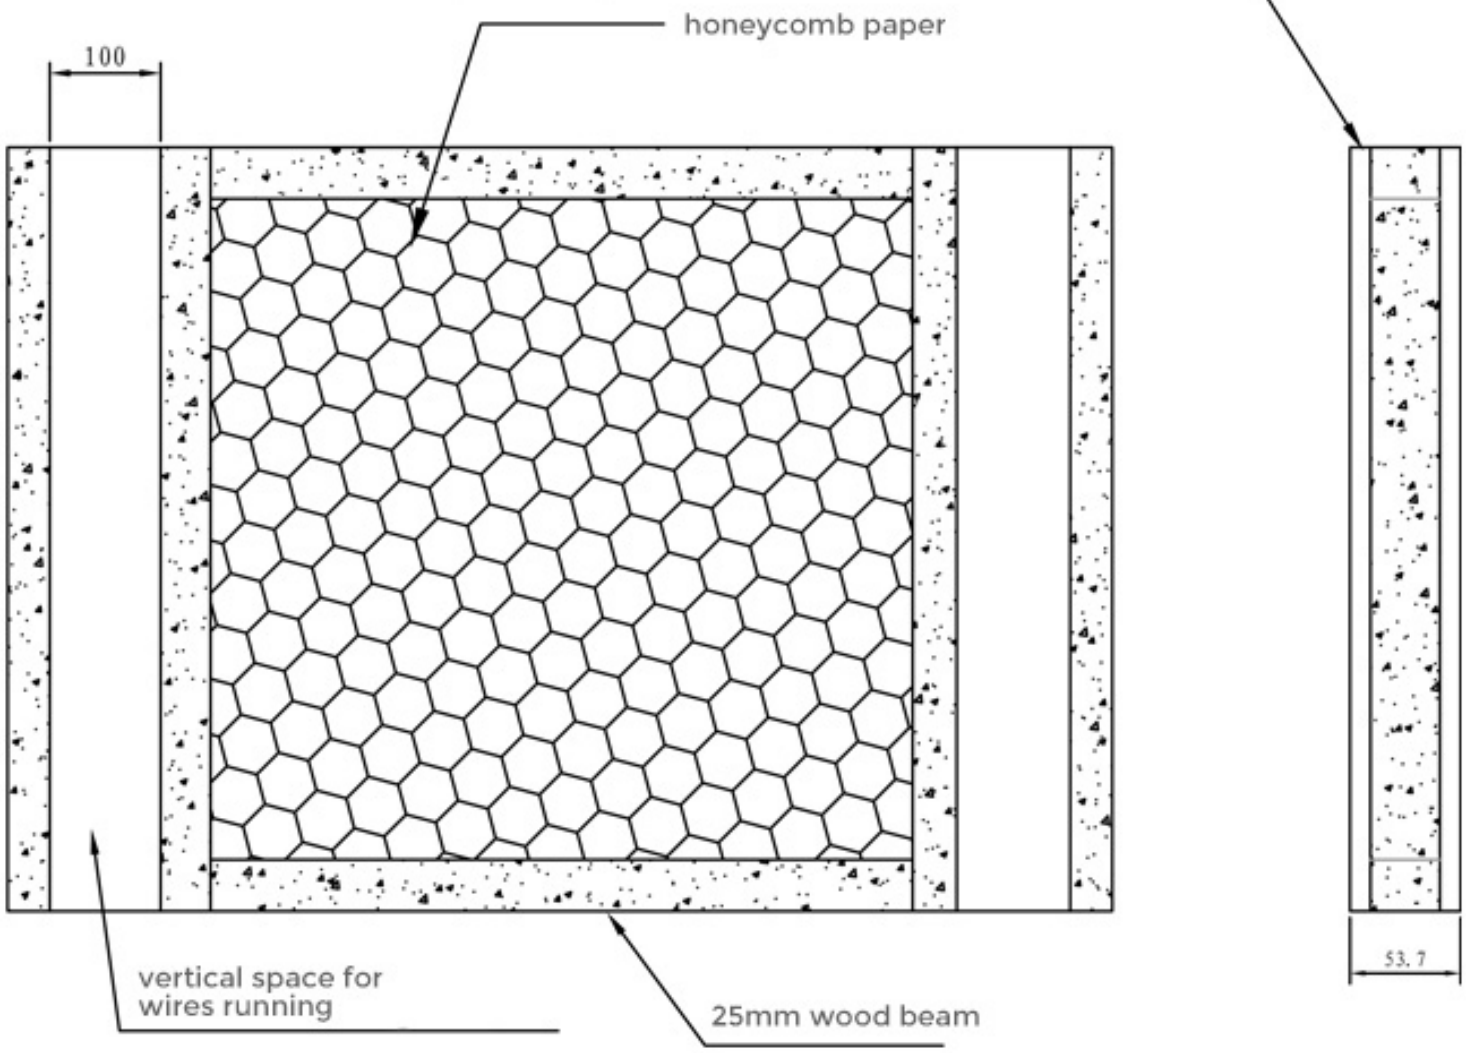
honeycomb paper
100
vertical space for wires running
25mm wood beam
53.7

03

STEPS OF ASSEMBLING

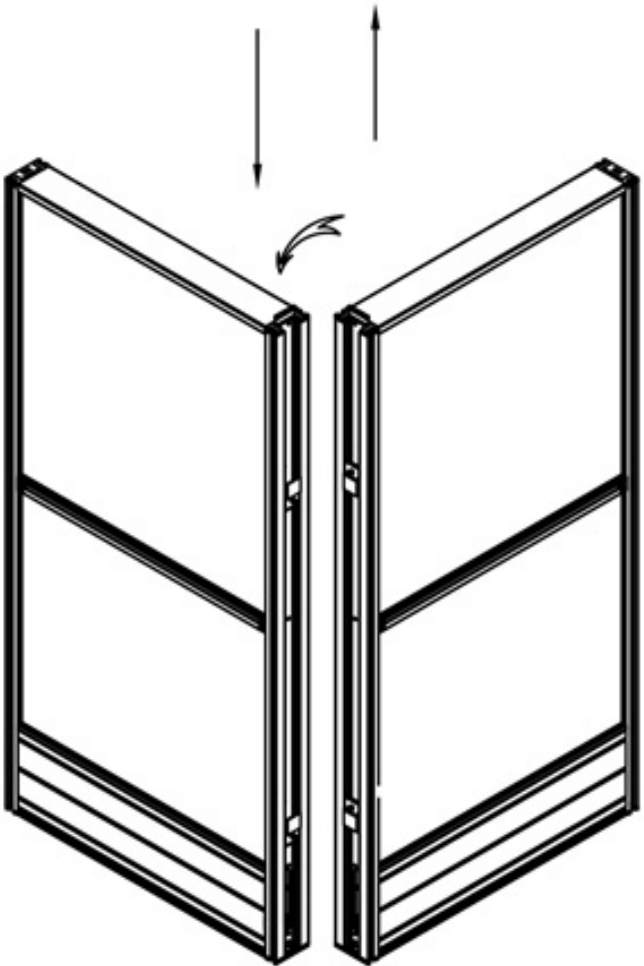

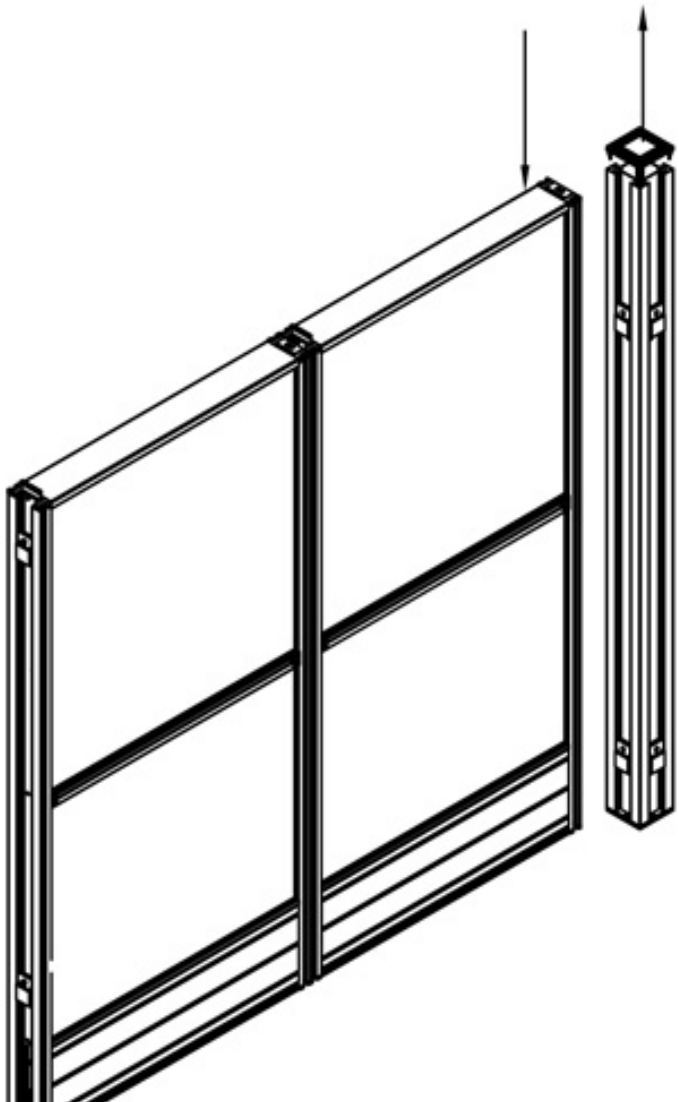

1. connect partitions

2. connect partition to column



3. connect all the partitions together and fit the trimings

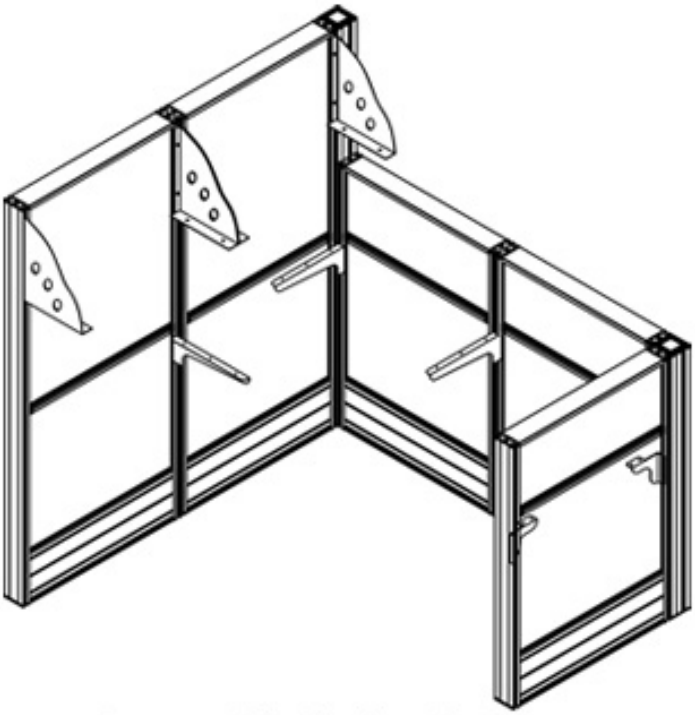

4. assemble the brackets



5.assemble the table tops and storages

CONNECTION METHOD

01

Connections&Trims



End triming



2 ways
connection



3 ways
connection



4 ways
connection



180° connection
in variable height



2 ways connection
in variable height



120° 3 ways
connection

02

Thin&Wide connections



2 way connection
T8-T3-LCA



3 way connection
T8-T3-TCA



4 way connection
T8-T3-XCA

ADD-ON PANEL

Convenient for stock and design change

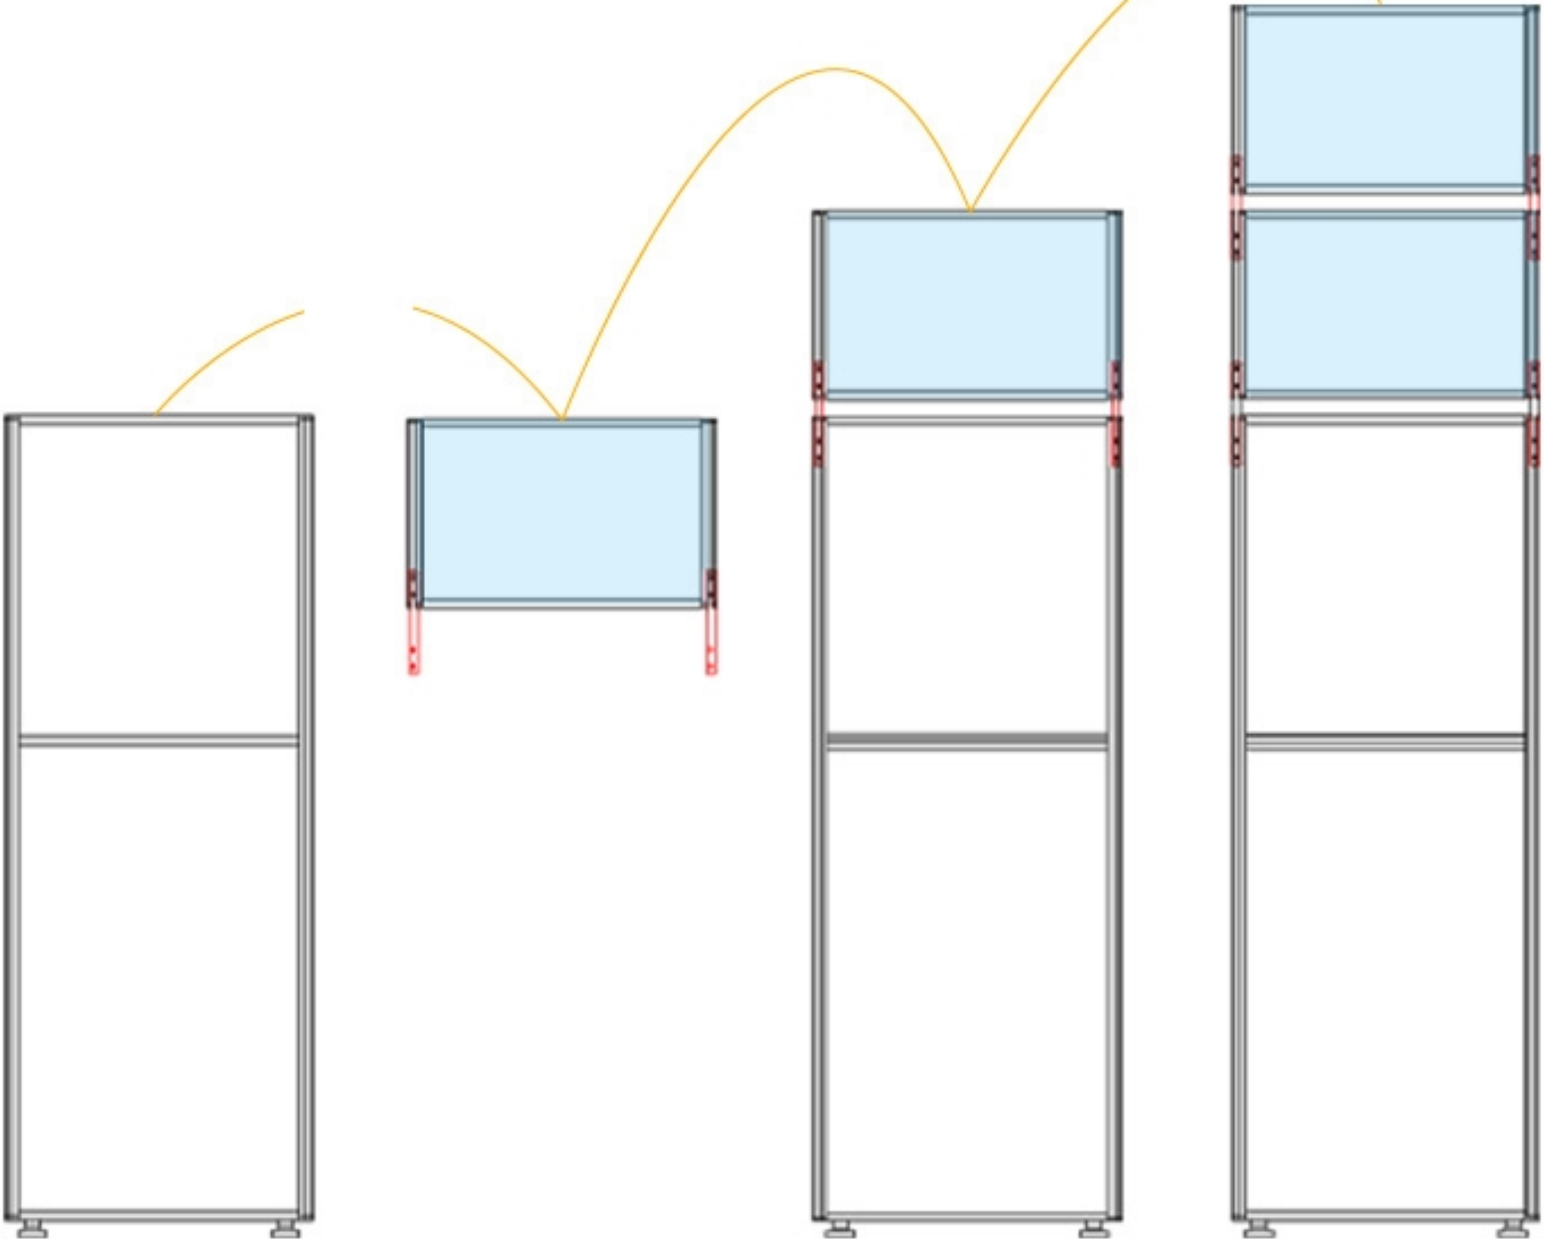

T8 tiles instruction

H(mm):1050,1200,1500,1650,1800
W(mm):450,500,600,750,800,900,1050

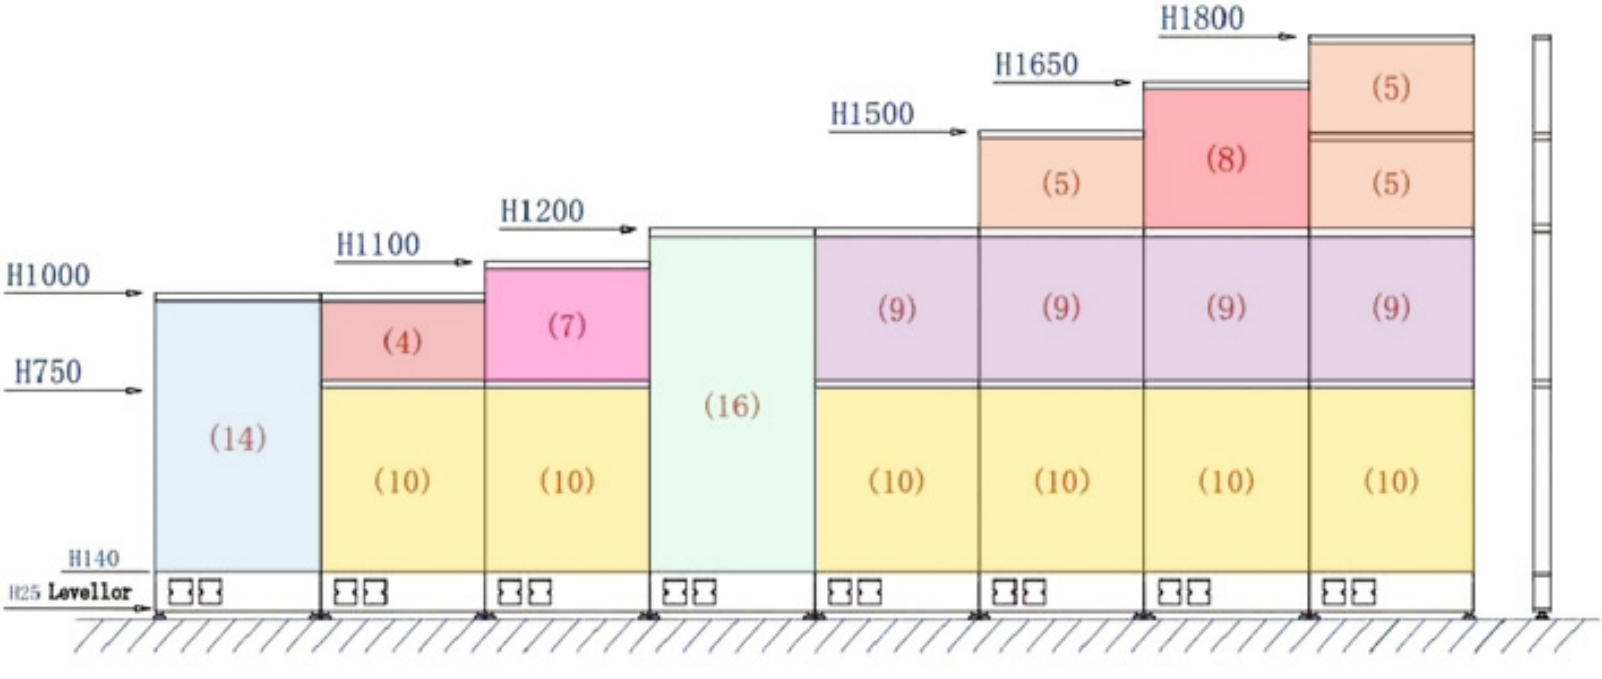
H1800
H1650
H1500
H1200
H1100
H1000
H750
H140
H25 Levellor
(5)
(8)
(5)
(5)
(4)
(7)
(9)
(9)
(9)
(9)
(14)
(16)
(10)
(10)
(10)
(10)
(10)
(10)
(10)

PACKAGE

Tight and firm, not easy to scatter